

AC-24-12(007) (4762) Iveconnect Adapter Cable



FITTING NOTES

1. This adapter cable is for vehicles with suitable Iveconnect controllers only. Refer to manufacturers guidelines for other models.
2. CVBS1 video input used for reverse camera. Configure menu option "Camera Activated by Reverse" as required.
3. CVBS2 & CVBS3 video inputs can be not triggered. Views only available through menu selection.
4. Terminals to be inserted in appropriate plug housing position. Terminals must 'click' in place.
5. Green wire (GROUND) to be connected to Terminal 31.
6. Power supply must be 12/24VDC, fused from source.
7. Failure to insert terminals in correct positions could lead to device failure or damage.
8. Power and ground wires to be connected to the correct sources. VSV accepts no liability for subsequent damage due to incorrect installation.

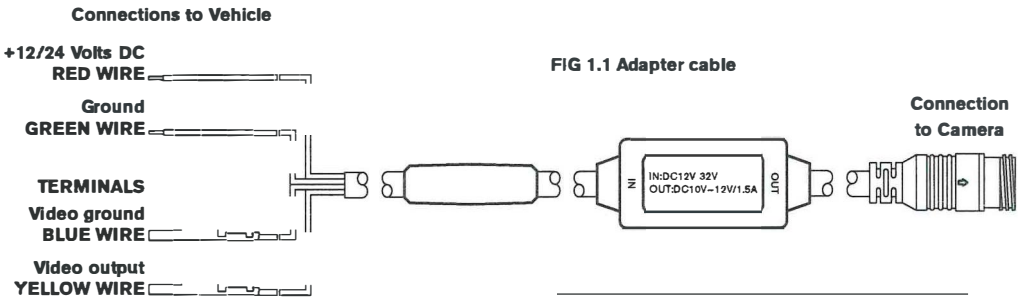


FIG 1.1 Adapter cable

FIG 1.2 Quadlock Connector (Rear of monitor)

| PIN | FUNCTION |
|-----|-----------------------|
| C2 | CVBS1 - Video input 1 |
| C4 | CVBS2 - Video input 2 |
| C5 | CVBS3 - Video input 3 |
| C8 | AGND - Ground CVBS1 |
| C10 | AGND - Ground CVBS2 |
| C11 | AGND - Ground CVBS3 |

